




Torsional Mounts (K50 Style) Without Offset

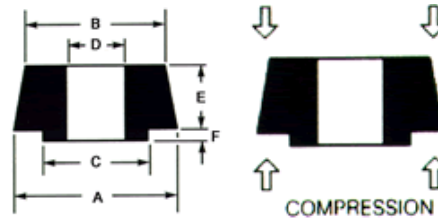

Part Number	Bottom Outside Diameter (A)	Top Outside Diameter (B)	Mounting Hole Diameter (C)	Inside Diameter (D)	Height (E)	Step (F)	Compression Spring Rate LBS/IN	Compression Maximum Recommended Deflection	Compression Load In LBS @ Max. Deflection	Elastomer	Availability
K51-40	1.75"	1.50"	1.12"	.625"	.688"	.124"	750	.175"	130	NEOPRENE	4 TO 6 WEEKS
K51-50	1.75"	1.50"	1.12"	.625"	.688"	.124"	1150	.175"	200	NEOPRENE	4 TO 6 WEEKS
K51-60	1.75"	1.50"	1.12"	.625"	.688"	.124"	1450	.175"	250	NEOPRENE	4 TO 6 WEEKS
K51-70	1.75"	1.50"	1.12"	.625"	.688"	.124"	2300	.175"	400	NEOPRENE	4 TO 6 WEEKS
K531-40	2.25"	1.64"	N/A	.625"	.90"	N/A	550	.12"	60	NEOPRENE	4 TO 6 WEEKS
K531-50	2.25"	1.64"	N/A	.625"	.90"	N/A	800	.12"	90	NEOPRENE	4 TO 6 WEEKS
K531-60	2.25"	1.64"	N/A	.625"	.90"	N/A	1100	.12"	130	NEOPRENE	4 TO 6 WEEKS
K531-70	2.25"	1.64"	N/A	.625"	.90"	N/A	1900	.12"	220	NEOPRENE	4 TO 6 WEEKS
K53-40	2.50"	1.775"	N/A	.625"	1.00"	N/A	750	.10"	75	NEOPRENE	4 TO 6 WEEKS
K53-50	2.50"	1.775"	N/A	.625"	1.00"	N/A	1000	.10"	100	NEOPRENE	4 TO 6 WEEKS
K53-60	2.50"	1.775"	N/A	.625"	1.00"	N/A	1500	.10"	150	NEOPRENE	4 TO 6 WEEKS
K53-70	2.50"	1.775"	N/A	.625"	1.00"	N/A	2500	.10"	250	NEOPRENE	4 TO 6 WEEKS

Karman Rubber
 2331 Copley Road • Akron, OH 44320
 P: (330) 864-2161 • F: (330)864-2124
 Web: www.karman.com
 Email: karman@karman.com